



**ADJ: Encore LP32IP**

One of ADJ's Encore Lime PAR series of IP65-rated LED wash fixtures that utilizes high output 20W 4-in-1 color mixing LEDs [RGB and Lime] is the Encore LP32IP. A multifunction fixture, designed to be used interchangeably as a wash, strobe, or blinder, the Encore LP32IP features 32 LEDs arranged in a 4 x 8 matrix and divided into eight independently controllable zones. The inclusion of the Lime LED color boosts both CRI and perceived brightness as well as filling in gaps in the color spectrum. It is capable of delivering white light with color temperature varying between 2,700K and 7,000K.

[www.adj.com](http://www.adj.com)



**Elation: Proteus Brutus™ Luminaire**

The Proteus Brutus is an LED wash luminaire with an IP65 rating. A high efficiency 1,200W Peak Field LED white LED engine with a color temperature of 6,500K produces an output of 70,000-lumens. The unit has a zoom range from 5° to 50° with a 220mm (8.7") front lens. It includes CMY color mixing, variable CTO, and six-position color wheel with an FX system that features six rotating gobos, animation wheel, high-speed iris, and frost. An optional indexable framing module is also available that provides full blackout shutter cuts for precise beam shape control.

[www.elationlighting.com](http://www.elationlighting.com)



**Magmatic: Therma Tour™ Haze Effect Generators**

Therma Tour is an oil-based haze effect generator that produces an exceptionally fine, long-lasting atmospheric haze. Available in a 350W and powerful 800W version – Therma Tour 600™ and Therma Tour 800™ – both machines create a safe, clean, and odorless haze effect that leaves no residue. The units hold 2.5 liters of fluid for over 35 hours of run time with no warm-up time required. Hang time is over 3 hours in an enclosed space after the unit has been turned off. Maximum output of the Therma Tour 600 is 1,200 CFM while the Therma Tour 800 delivers 5,600 CFM. Control options include wireless RF remote, Elation E-Fly wireless DMX, wired remote, Magmatic App, and manual touch-screen control.

[www.magmaticfx.com](http://www.magmaticfx.com)



**Chauvet: COLORado PXL Bar 16**

COLORado PXL Bar 16 is an IP65-rated tilting batten with a 5.8° to 47.9° zoom range and a 200° tilt range that's fully pixel mappable. This moving pixel bar also features seamless edge-to-edge mounting that maintains pixel pitch between fixtures. It includes virtual gobo and movement macros with separate foreground and background color control for pixel animation effects. Slotted Omega brackets make it quick and easy to hang. It can also be positioned on the ground. Control options include DMX, SACN, Art-Net, and Kling-Net, and it is RDM Enabled for remote addressing and troubleshooting. It includes TRUE1 compatible power input/output ports and IP65-rated 5 pin DMX, TCP/IP input/output ports, and USBc software upload port.


[www.chauvetprofessional.com](http://www.chauvetprofessional.com)



**GLP: ArenaLED Sports Luminaire**

The ArenaLED is designed for large-scale sports and event venues. The centerpiece is the efficient ArenaLED3, with 145 lm/W efficiency and luminous flux of up to 73,500 lumens. These can be clustered together, while the three lamp heads inside can be swiveled through 30°. The ArenaLED3 can be individually adapted and aligned according to the requirements to ensure a permanently homogeneous light distribution. Several units can be interconnected in 2.5° steps and installed at an angle of 15°. ArenaLED3 is equipped with 5,700K white light LEDs and a color version with RGB color control is also available.

[www.germanlightproducts.com](http://www.germanlightproducts.com)

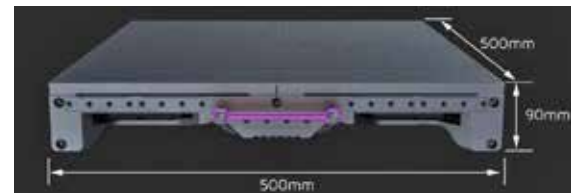

**ROE Visual: Black Pearl BP2V2 LED Panel**

The Black Pearl BP2V2, specially developed for use in the film industry and xR applications, offers the trusted performance of the Black Pearl BP2 in an updated version with high-speed components and true-to-content color representation. These modifications result in the identical, perfect on-camera performance as the BP2, but with a more streamlined setup and handling. With its high frame rate, high refresh rate, and low scan lines it is perfect for on-camera jobs as well as live events. Black Pearl offers a user-friendly and innovative design. The integrated magnet-assisted assembly and the smart-lock system allow for easy positioning and efficient installation.

[www.roevisual.com](http://www.roevisual.com)



**Claypaky: Volero Batten Aqua Luminaire**

Volero Batten Aqua is a high-performance LED moving batten. The light source is made up of 10 60W Osram RGBW LEDs, adopting extra-wide 80x80mm lenses and some important features like the separate control of the zoom in two groups from five adjacent lenses. It has a zoom range of 4° to 55° and a tilt > 215°. Features include an IP66 protection rating, standard Wireless DMX control, and a large number of effects and built-in macros. It also offers Advanced Layers Management, with which the operator can choose to use different levels of effects simultaneously—Background Color; Internal Shape; and Pixel Mapping.

[www.claypaky.it](http://www.claypaky.it)



**Kvant: Spectrum Series Laser**

The Kvant Spectrum lasers have all been redesigned and upgraded. Improvements include a redesigned housing using an aluminum foam chassis that makes the systems over 30% lighter, smaller, and more robust than predecessors, while still being compatible with standard accessories. A new cushioned heat sink with advanced thermal management and updated ergonomics improves the resistance of the system against external factors like dust or heat. All Spectrum lasers come integrated with Pangolin's FB4 media server. In addition, all Spectrum lasers come with Pangolin's QuickShow software free of charge with an easy upgrade path to Pangolin's BEYOND software.

[www.lasershowprojector.com](http://www.lasershowprojector.com)



**Whirlwind: Catdusa MultiCat**

The Catdusa MultiCat is designed to be an indestructible 12-channel RJ45 breakout box with Whirlwind's W1 multipin connector. Like other Catdusa products, it uses Ethernet Cat cable to transmit DMX or analog audio protocol. It has Neutrik etherCON connectors, which are wired with 110-ohm cable to maintain AES and DMX performance when using shielded Cat cable. Catdusa products can be used together to create a fan-to-fan snakes or combined with other Catdusa pieces to create a flexible and comprehensive stage sub snake system for lighting or audio control. By using Whirlwind's W1 multipin connector, customers can use the Catdusa family of breakout boxes with Whirlwind's existing W1 Patchmaster®

[www.whirlwindusa.com](http://www.whirlwindusa.com)