

Altman Hydra Series

Altman's Hydra Series answers the call for a luminaire that could work safely inside and outside, integrate with existing systems, and provide a perfect a "spot to wash" transition. The AIP-200 is a compact 200W RGBL IP65-rated and convection cooled zoom PAR. The silent, compact luminaire weighs 13.44 pounds and pairs a high lumen output with a wide zoom range. The motorized zoom produces a beam spread between 6.5° and 50° with built-in stops at five different set points ensuring precise beam spread repeatability.



altmanlighting.com

Blizzard Hemisphere

Blizzard's Hemisphere is a new 15W 4-in-1 RGBW lighting effect fixture fitted with a single LED light source. It's powered by a rechargeable lithium-ion battery with a 10-hour runtime, and runs up to 16 hours on a single color. An 8.5V 2000ma charger is also included. It also features wireless compatibility for DMX control via the At Full lighting control app, which is available on both iOS and Android. Additionally, users can control DMX with Art-Net, sACN, and WiFi-enabled devices, plus manual or remote control options.



blizzardpro.com

Chauvet Professional Ovation Rêve E-3

Chauvet's ultra-quiet Ovation Rêve E-3 offers theatres, broadcast studios, houses of worship and others a way to get both a variable white ellipsoidal fixture and color rendering fixture in one unit. It creates whites with a 95+ CRI and high TM-30 RF, delivers a level of brightness equal to that of a 750-1000W incandescent fixture and also features a linear CCT adjustment with +/- Green to match other sources light sources in a rig. Color temperature presets range from 2800 to 8000K.



chauvetprofessional.com

Elation Professional KL PAR FC


Elation Professional's new KL PAR FC is a full-color LED PAR light that joins the company's KL "Key Light" Series. Designed as a highly effective key, fill, and area wash light source for broadcast, film and theatre, the KL PAR FC is equipped with a 280W RGBMA LED engine with CCT adjustments possible from 2,400K - 8,500K along with saturates and soft-field pastels. Its high CRI (92) and TLCI (95) allow for extremely accurate color re-creation, for both the eye and camera.



elationlighting.com

Environmental Lights Strip Lights

Environmental Lights' new Continuous RGB LED Strip Light and Continuous Tunable White LED Strip Light are designed to eliminate hot spots and serve as durable, flexible and low-profile strip light solutions. Fully dimmable, the strip lights can mix Red, Green and Blue (RGB version) or offer 2400K to 6500K color temperatures (Tunable White version). The strip lights are UL Listed, IP20CE rated and promise 50,000 hours of use. They run on 24 VDC and are easy to control utilizing compatible controllers and dimmers from Environmental Lights.

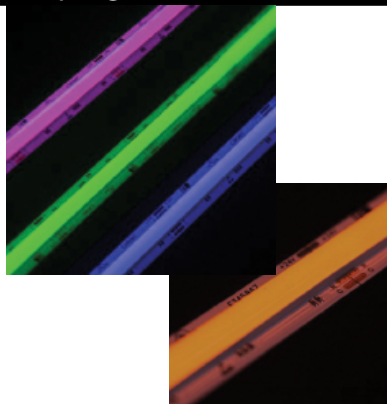

environmentallights.com

Mega-Lite DECO Cove Q18 LED Strip

The new DECO Cove Q18 from Mega Systems Inc. is an LED strip with color mixing for indoor use. This unit has a total of 60 LEDs with a total of 18W per fixture. Featuring Red, Green, Blue, and Warm White capabilities, it helps users create a wide spectrum of color combinations. It also lets them achieve true warm white projections with the 3000K WW color temperature. The aluminum housing keeps the strip rigid enough for easy installation while still providing flexibility.



mega.lighting

Portman Mantis

Poland-based Portman (portmanlights.com), distributed by Inner Circle Distribution, debut the Mantis, a new species of decorative light fixtures promising distinctive lighting looks, solo or in clusters. There are three main warm light sources that emulate halogen lighting. These are accompanied by an RGBW glow with smooth color mixing. In the center, there is one RGBW light source with a frosted diffuser and optional gobo. The 25.5 x 25.5 x 6.7" inch fixtures weigh 17.5 lbs. Control is via 5-pin XLR connectors or an optional WDMX module.



icd-usa.com

Robe iPointe65 and iSpider

Robe expands its all-weather IP65 rated iSeries with the iPointe65 and the iSpider. The iPointe65 is a multifunctional luminaire modeled on Robe's MegaPointe. The iSpider is modeled on Robe's Spider LED wash beam. As with the iPointe65, on-board NFC technology enables remote access for diagnostic and performance features from a mobile device or smartphone via the Robe Com app. These two new iSeries products join the iBar and the iParFect 150TM as Robe's family of weather resilient outdoor fixtures expands.



robe.cz

Ultratec Special Effects TwisterX Fan

Ultratec Special Effects' TwisterX Fan can be positioned front of stage, mounted on a wheeled base or hung from the lighting rig. Used with Ultratec's Swivel Bracket, the compact fan can maximize any atmospheric effect with 1,500 cfm of power. The adjustable base makes angle adjustment easy, and users can choose between wide air dispersion when the TwisterX is operated in forward blade direction and a more narrow, focused dispersion when operating in reverse direction. DMX with RDM compatibility let users adjust fan speed with precision.



ultratecfx.com

Whirlwind PL-PM1RJ Power Meter

Whirlwind's PL-PM1RJ power meter is designed for remote monitoring voltage, current, and frequency on 3 phase Y power with three 120 Volt AC legs or single-phase AC with two 120 Volt legs. You can monitor your power from a laptop, tablet, or any smart phone through any Ethernet LAN and via the Internet. This allows real time power distribution monitoring from any location or multiple locations simultaneously. Features include IP addressing to integrate easily into existing LANs, and unit naming to identify individual monitoring locations.



whirlwindusa.com